


DUAL INSPECTION & WORK LIGHT

JCB-WL-TWIN INSPECTOR

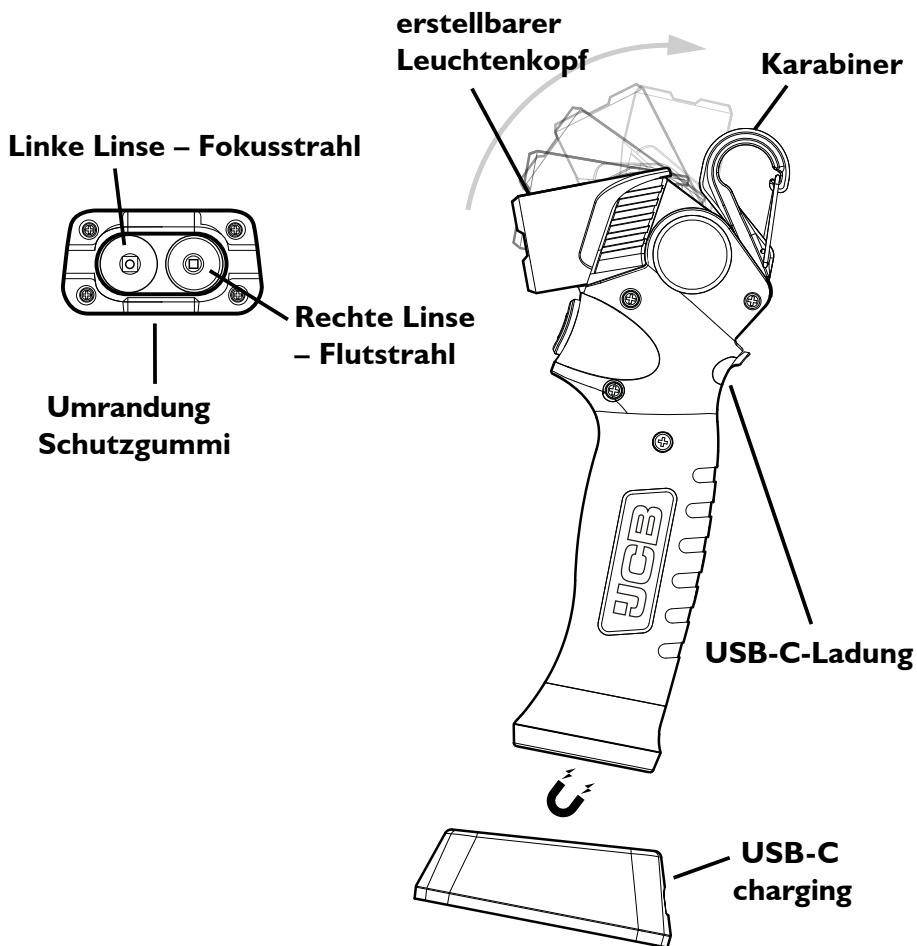

PRODUCT DESCRIPTION

Dual light inspection torch with focus and flood lights

Ergonomically designed with charging base

IP65 water and dust proof

Output 1000 lumens

Battery status indicator

Magnetic base

Removable carabiner

SPECIFICATION

Charging: USB-C either through charging base or direct to the torch

Battery: 3.7V 4500mAh Li-ion

Charge time: 3 hours

Runtimes: Focus light 550lm-4hrs, 1000lm-3hrs, 25lm-116hrs

Flood light 480lm-6.5hrs, 90lm-29hrs

Beam distance: Focus light 550lm-118M, 1000lm-170M, 25lm-85M

Flood light 480lm-30M, 90lm-13M

Colour temp: 6500K

OPERATION

The light is controlled by the trigger switch under the light head

A short press turns the light on, recalling the output level and light setting when it was last used.

To change the lighting mode between the Focus (left) and Flood light (Right) press and hold the switch until light mode changes.

Once you have selected the desired light mode, a short press on the switch changes the output levels until you reach the required brightness setting.

The focus light has 3 settings the first is 550lm, second 1000lm, third 25lm

The flood light has 2 settings the first is 480lm, second 90lm

When you have finished press the switch again to turn off the light.

BATTERY STATUS INDICATOR

This will show a blue light when it is fully charged and remain blue until the battery level reaches 30%

At 30% the light will change to red indicating that the light is getting low on power.

At 5% the light will flash to indicate that the light is very low on power and needs charging.

SAFETY NOTICE

Prior to use carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk.

GENERAL

Ensure the worklight is correctly charged before initial use

DO NOT cover or block the lens during use

DO NOT shine the product directly into the eyes of people or animals

DO NOT allow children to use the worklight

DO NOT handle or move the worklight while it is being charged

DO NOT use the worklight if you suspect it is damaged

DO NOT place the product in or near naked flames

DO NOT open the equipment or touch any of the internal parts

DO NOT open the battery pack

DO ensure the worklight is unplugged and allow to cool before attempting cleaning and maintenance

BATTERY

WARNING! To reduce the risk of fire or burns:

DO NOT attempt to open, disassemble, modify or service the battery

DO NOT expose to temperatures below 10°C or above 40°C

DO NOT crush, puncture, short external contacts or dispose of in fire or water

DO NOT dispose of with regular waste - dispose of the old batteries in

accordance with local authority battery regulations

DO NOT cover the battery while charging

Ensure the charger is switched off and disconnected from the worklight before attempting to open the lamp unit

If the electrolyte in the cells comes into contact with the skin, wash thoroughly with soap and water

If the electrolyte in the cells comes into contact with the eyes, rinse thoroughly with cold water and seek immediate medical attention

The worklight should be turned off during charging to prolong battery life

SAFETY NOTICE

ELECTRICAL

WARNING! It is the user's responsibility to read, understand and comply with the following electrical instructions:

Ensure the risk of electrical shock is minimised by the installation of appropriate safety devices

Inspect the charger cable and connection for wear and damage to ensure the items are safe before connecting to the mains power supply

DO NOT use if worn or damaged

Check cables are always protected against short circuit and overload

DO NOT place the connector into any area of the worklight except the correct outlet socket

DO NOT use the cable to charge or power any other electrical items

DO NOT wet the cable or use in wet or damp conditions (indoor use only)

MAINTENANCE & STORAGE

When not in use store the product in a safe, clean, dry environment out of the reach of children

Keep the worklight clean from dirt and grease using a damp cloth

DO NOT submerge in water

DO NOT clean the worklight with solvents

Check the product for damage before each use

If the product is not used for a long time, the battery will go into over discharge protection. To re-activate the battery, charge three or four times for 30 seconds until the indicator light comes on. Then fully charge the battery as normal.

GUARANTEE

This product is guaranteed against manufacturing defects for a period of 3 years from the date of purchase.

Repair or replacement of products will be undertaken providing that:

- The product has been subject to fair wear and tear only
- The product has not been subject to accidental or cosmetic damage
- The product has not been misused and has been used only in accordance with the instruction manual provided
- The product has not been subject to insufficient servicing and maintenance
- The product has not been subject to any abnormal environmental conditions or inappropriate operating conditions
- Repairs have not been attempted by an unauthorised person and no modifications have been made to the product

The guarantee excludes the following (where relevant):

- Components normally subject to wear and tear
- Batteries and chargers

Your statutory rights are not affected.

We reserve the right to alter specifications without prior notice

WE WILL NOT BE LIABLE FOR ANY INJURIES OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT

GENERAL WARNINGS & DISPOSAL

This product has been marked with a symbol relating to removing electric and electronic waste. The product should not be discarded with household waste but must be returned to a collection system which conforms to the European Directive 2012/19/EU. It will then be recycled or dismantled in order to reduce the impact on the environment. Electric and electronic equipment can be hazardous for the environment and for human health since they contain hazardous substances.



Euverify Ltd

Unit 3D North Point House, North Point
Business Park, New Mallow Road, Cork,
T23 AT2P, Ireland
info@euverify.com

www.jcbworklights.com | sales@jcbworklights.com

JCB Lighting is used under licence by Property Perspective Ltd